P126 Datasheet

2W 6V
August 2026

High-efficiency, waterproof, UV and scratch-resistant solar panel for industrial IoT

Features

- IPX7 waterproof rated
- 10+ years UV exposure testing
- Third-party agency qualification
- 24.4% high-efficiency Sunpower solar cells
- Black matte appearance
- Low friction, anti-dust surface

Applications

- Asset tracking
- Agriculture
- Weather stations
- LoRa nodes
- Level monitoring
- Tank monitoring
- Pipeline sensors
- Smart cities
- Smart home
- Lighting

Electrical Characteristics

Symbol	Parameter	Nominal	Expected[1]	Unit
W_P	Max power (mpp)	2.62	2.21	W
V_P	Voltage @ mpp	7.48	7.21	V
I_P	Current @ mpp	0.35	0.31	A
V_{OC}	Open-circuit voltage	8.74	8.48	V
I_{SC}	Short-circuit current	0.37	0.31	A
η	Cell efficiency	24.4	-	%

1 — Expected values are adjusted for real-world losses that include cutting of cells, imperfect transmissivity of the EVA and ETFE encapsulation layers, and the tolerance of the lowest performing cell piece in the series.

Key Links

- Panel Technical Drawing
- Related Products Overview
- Testing Review of ETFE Material Stack

Description

P126 is a durable, high-performance ETFE solar panel designed for industrial IoT applications. It is lightweight, efficient, and cost-effective. SMT ETFE panels are advantageous when size or weight is constrained, long lifetimes are desired, and strict quality and dimensional tolerances must be maintained.

Voltaic ETFE panels are manufactured using a strictly sourced and qualified material stack. They are third-party tested for the equivalent of 10+ years of UV exposure in addition to thermal cycling, vibration stresses, and exposure to chemicals and oils. They are used in a number of ATEX applications.

Mechanical Characteristics

- **Dimensions**: 136 x 112 x 3.1 mm
- **Weight:** 79 g
- **Standard Tolerance**: ± 0.5 mm
- **Compliance:** RoHS and REACH
- **Testing:** relevant sections of IEC 61215, SAE J1455, and IEC 60529
- **Mounting:** G110 VHB gasket
- **Operating Temperature:** −40°C to 85°C
  Cable: 3.5x1.1mm jack

Copyright © 2026 Voltaic Systems

Electrical Characteristics

Current-Voltage Characteristics

1 — Data collected at STC (1,000 W/m^2, 25°C)

The following graph is a representative, real-world IV curve of the P126 at STC[1]. IV Curves are taken outdoors using a calibrated light meter. Nominal values are calculated based on the theoretical efficiency of solar cells. Expected values account for real-world conditions seen after cell cutting and lamination.

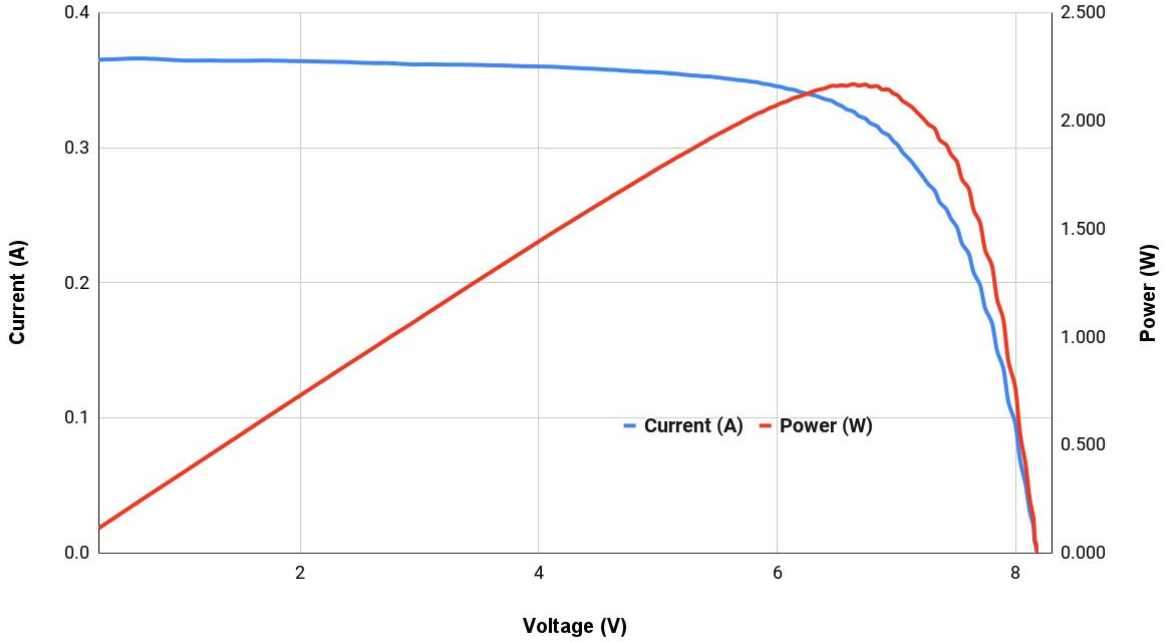

Revision History

This panel is periodically revised to use the latest and most cost-effective solar cell technology. Nominal specifications of each revision are detailed here. Mechanical dimensions and electrical specifications are maintained across versions so that the panel remains as a stocked, drop-in solution for production devices.

Revision[2]	W_P (W)	V_P (V)	I_P (A)	V_{OC} (V)	I_{SC} (A)	Solar Cell	Last Produced
R3C	2.62	7.48	0.35	8.74	0.37	SunPower 24.4% Maxeon Gen III	2026-08
R3B	2.65	7.48	0.36	8.74	0.37	SunPower 24.4% Maxeon Gen III	2025-06
R3A	2.56	7.31	0.35	8.59	0.37	SunPower 23.5% Maxeon Gen III	2025-01
R1M	2.40	7.09	0.34	8.59	0.38	SunPower 21.5% Maxeon Gen V Ø211	2024-12
R1L	2.38	7.09	0.34	8.59	0.37	SunPower 21.5% Maxeon Gen V Ø211 - Ln	2023-10
R1K	2.61	7.33	0.36	8.69	0.37	SunPower 24% Maxeon Gen III Ø166 - Me3	2022-03
R1H	2.47	7.09	0.35	8.76	0.38	SunPower 22.6% Maxeon Gen V Ø211 - Mn1	2022-01
R1F	2.45	7.09	0.36	8.76	0.38	SunPower 22.6% Maxeon Gen V Ø211 - Mn1	2021-07
R1E	2.37	7.28	0.33	8.51	0.36	SunPower 22.7% Maxeon Gen III Ø166 - Je3A	2021-06
R1D	2.37	7.28	0.33	8.51	0.36	SunPower 22.7% Maxeon Gen III Ø166 - Je3A	2020-04

2 — Unreleased revisions have been omitted from the table

Copyright © 2026 Voltaic Systems

Mechanical Characteristics

Technical Drawing

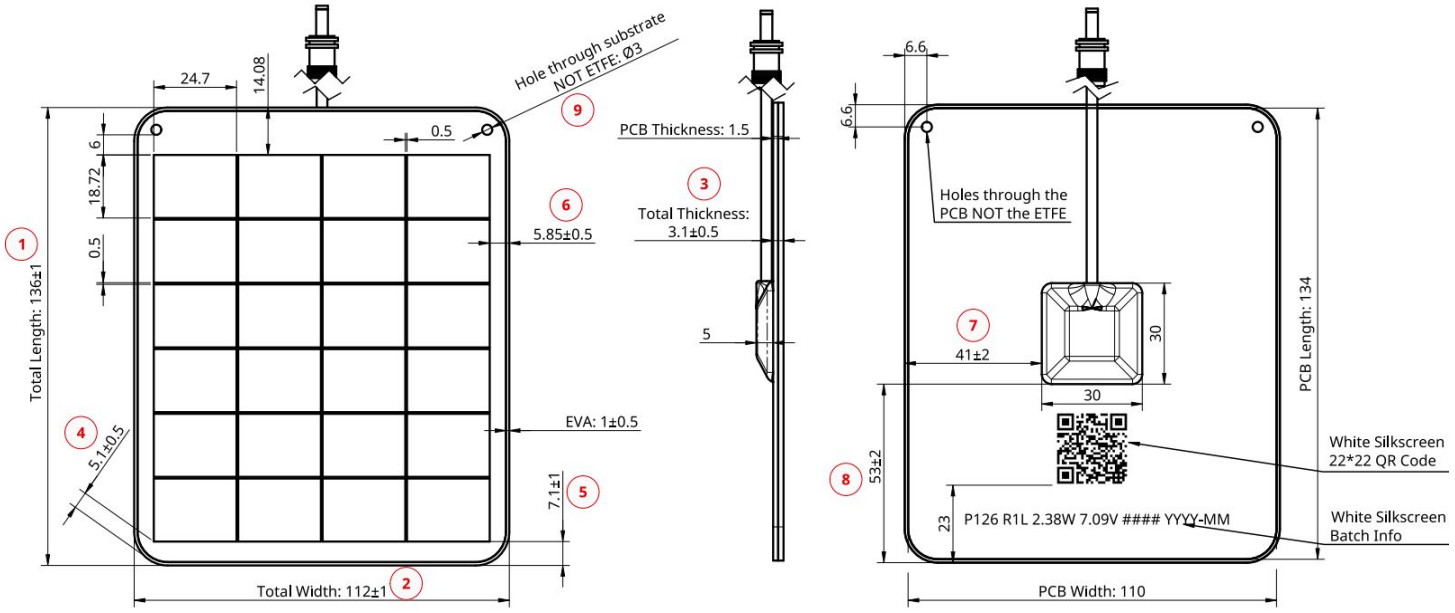

Material Stack Diagram

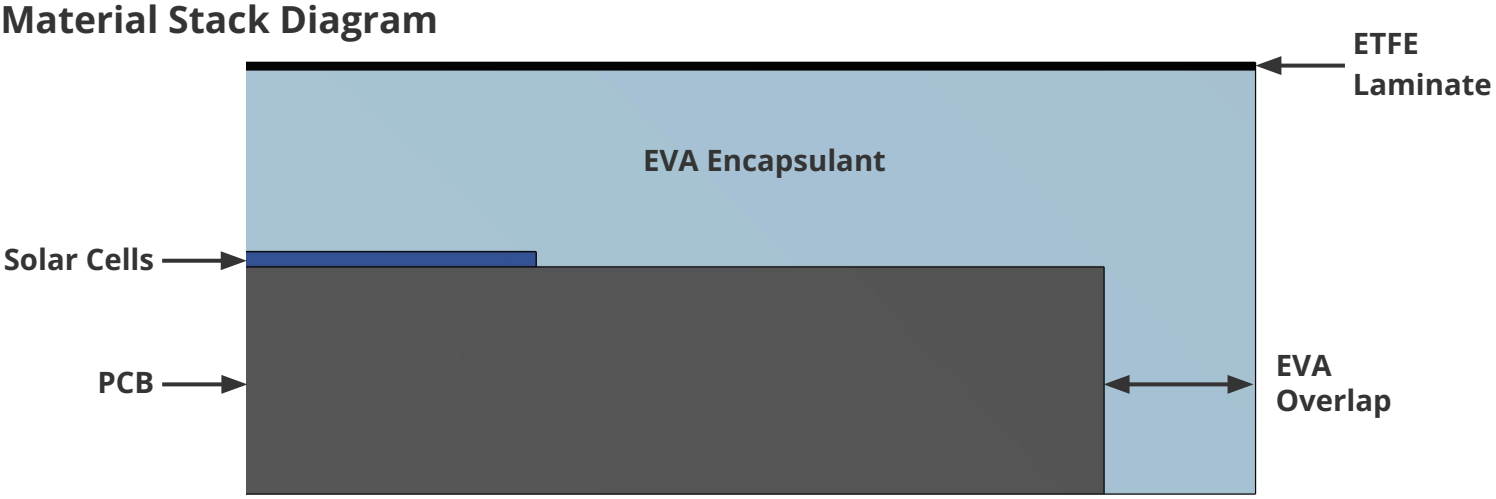

Construction Specifications

SMT ETFE solar panels consist of laser-cut Sunpower solar cells surface-mounted onto a double-sided PCB. The cells are encapsulated with an EVA adhesive and laminated with a layer of textured ETFE. The gap between the cell edge and panel edges provides a buffer against moisture ingress and potential delamination.

Voltaic's ETFE material stack has passed mechanical stress tests referencing IEC 61215, SAE J1455, IEC 60529, MIL-STD 810H, AAR-S-9401, and IEC 62262 IK08/09. Performed by multiple third-party agencies, these tests include accelerated aging (UV exposure), temperature and humidity cycling, damp heat, thermal shock, mechanical shock, impact, vibration, ingress, and exposure to chemicals and oils.

Copyright © 2026 Voltaic Systems