


Top


LED Charge indicators (x4):
Flash in sequence when charging.

Micro-USB Port: 5-8V Input


USB-C Port: 5V Input

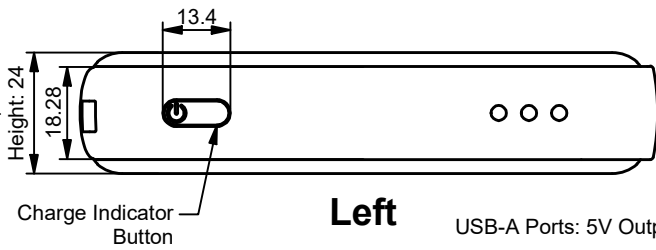

Left


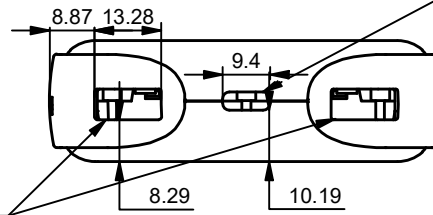


Front

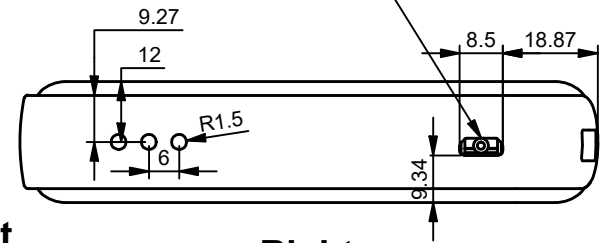

Right

USB-A Ports: 5V Output

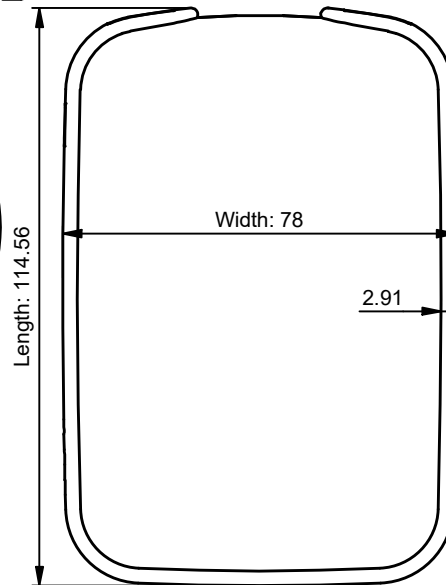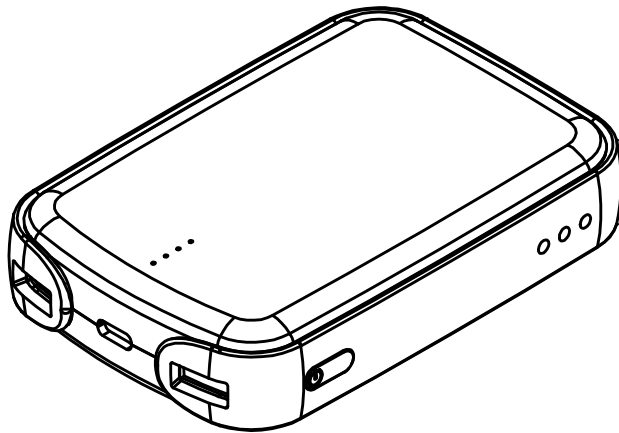

Bottom

- NOTES:**
1. All materials RoHS compliant
 2. Material: Fire resistant ABS



This document contains proprietary information and should not be copied or shared without the consent of Voltaic Systems.

FILE DETAILS

PRODUCT NAME:			
V50 USB Powerbank			
DWG. NO.:			R1B
DWG. TYPE:			Production
SCALE:	UNITS:	TOLERANCE:	SHEET:
1:1.5	MM	±0.1mm	1
CREATED BY:		DATE:	
ME		2020-02-20	
REV.	CHANGE:	DATE:	CHK'D BY:
1	B	2020-02-20	